



# RE PA-ATEX

## Transition from large to small thread

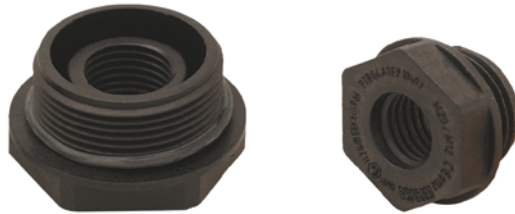

### TECHNICAL DATA

PA EX reducer

Temperature range -20°C to +70°C  
Protection class IP 66

### STRUCTURE

- Material: Polyamide (PA)

### PROPERTIES

- halogen-free
- phosphor-free
- silicone-free
- cadmium-free

### APPLICATION

- Machine and plant construction
- Robotics
- Automation technology
- Vehicle construction and shipbuilding
- Installation technology
- Control cabinet construction

### NOTES

- Approval: PTB 04 ATEX 1040X
- Legend:  
Dimensions  
TD - Thread Diameter  
SI - Size of the internal thread

### from metric to metric

Size outside	Size inside	Packaging unit (in pc.)	black (RAL 9005) Part no.
M25 x 1.5	M12 x 1.5	100	904428
M25 x 1.5	M16 x 1.5	100	904429
M25 x 1.5	M20 x 1.5	100	904430
M32 x 1.5	M16 x 1.5	50	904431
M32 x 1.5	M20 x 1.5	50	904432
M32 x 1.5	M25 x 1.5	50	904433
M40 x 1.5	M20 x 1.5	25	904434
M40 x 1.5	M25 x 1.5	25	904435
M40 x 1.5	M32 x 1.5	25	904436
M50 x 1.5	M20 x 1.5	5	904437
M50 x 1.5	M25 x 1.5	5	904438
M50 x 1.5	M32 x 1.5	5	904439
M50 x 1.5	M40 x 1.5	5	904440
M63 x 1.5	M20 x 1.5	5	904441
M63 x 1.5	M25 x 1.5	5	904442
M63 x 1.5	M32 x 1.5	5	904443
M63 x 1.5	M40 x 1.5	5	904444
M63 x 1.5	M50 x 1.5	5	904445

# RE PA-ATEX



## Transition from large to small thread

from metric to metric - high-profile design

Size outside	Size inside	Packaging unit (in pc.)	black (RAL 9005) Part no.
M16 x 1.5	M12 x 1.5	100	<b>904446</b>
M20 x 1.5	M16 x 1.5	100	<b>904448</b>