


HSSV-SM

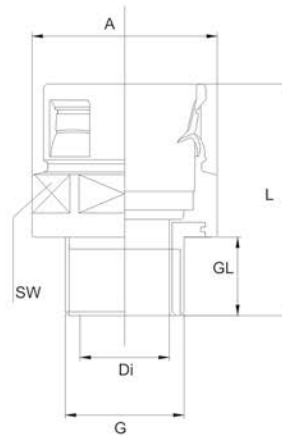

TECHNICAL DATA

Corrugated tubes conduit gland

Temperature range	-40°C to +110°C
Protection class	IP 65

■ STRUCTURE

- Material: Polyamide (PA) 6
- Flammability acc. to UL 94 (V0)

■ PROPERTIES

- halogen-free
- cadmium-free
- resistant to: fuels, mineral oils, greases, weak bases, weak acids

■ APPLICATION

- Machine and plant construction
 - Robotics
 - Automation technology
 - Vehicle construction and shipbuilding
 - Railway technology
 - Installation technology
 - Control cabinet construction
 - Quick-insert glands with metallic male thread for a reliable, quick connection.
- Suitable for parallel-coiled HELUcond protection tubes.

■ NOTES

- Protection classification:
IP 66 with outer seal
- Threaded connection:
metric to EN 60423
- Each unit includes 1 safety opener

metric thread

Size	Suitable for nominal size	Thread length mm	Spanner size mm	Packaging unit (in pc.)	grey Part no.	black Part no.
M12 x 1.5	10.0	10.0	19	50	920229	920238
M16 x 1.5	10.0	10.5	19	50	920230	920239
M16 x 1.5	12.0	10.5	21	50	920231	920240
M20 x 1.5	16.0 / 17.0	12.0	27	50	920232	920241
M25 x 1.5	21.0 / 23.0	15.0	36	50	920233	920242
M32 x 1.5	29.0	15.0	40	25	920234	920243
M40 x 1.5	36.0 / 37.0	16.0	50	25	920235	920244
M50 x 1.5	48.0 / 50.0	16.0	65	10	920236	920245
M63 x 1.5	48.0 / 50.0	15.5	60	10	-	920246