


SR Marking rings

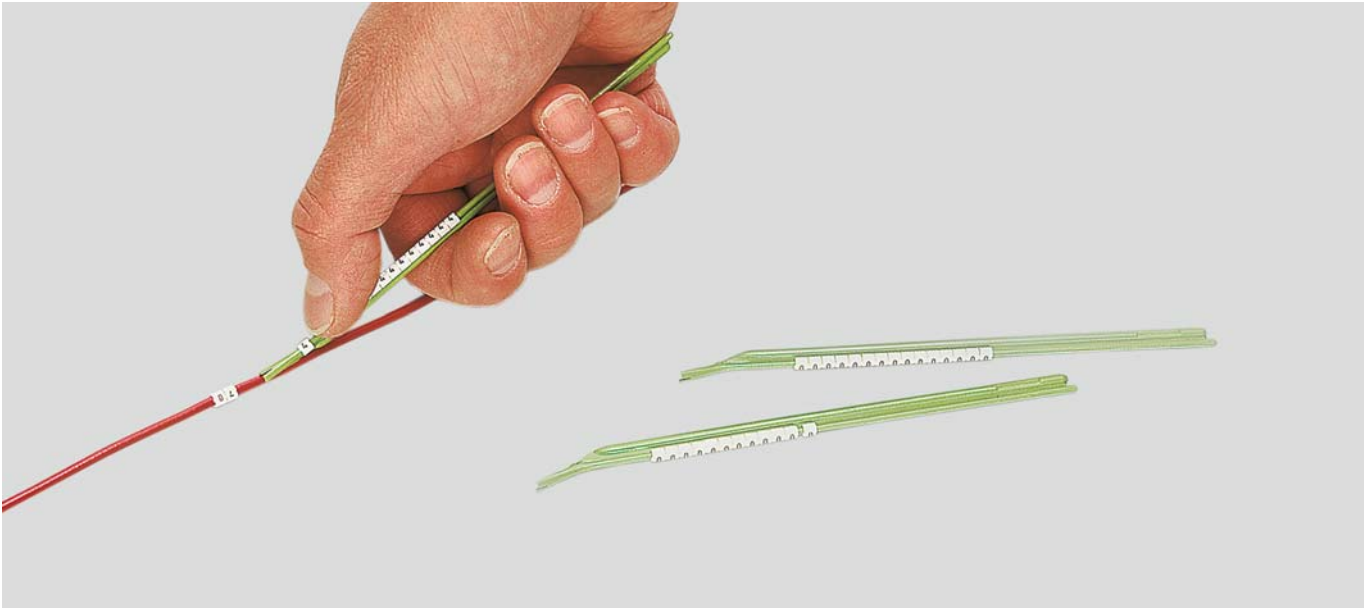

SR

Simple handling afforded by applicator characterise these marking rings. The nozzle-shaped applicator is forced onto the cable and the snap-on sleeve pushed with the thumb. The marker sits tight on the cable without slip. Available in white or yellow with black marking.

Application

1.0 mm to 19.0 mm
0.10 mm² - 100 mm²

Material

Copolymer

- halogen-free

Properties

Halogen-free, resistant to oils, cleaning agents, fuels and alkalis.

Note

Code:

Replace the XX by the number of your required letter, figure or symbol.

1 unit = 10 rods with each 30 rings.

Product 956xx up to 959xx without rod. The rod can be ordered separately.

Technical data

Temperature range: -40°C up to +105°C

Part no.	Colour with inscription	Type	Cross section from - to mm ²	Cable Ø from - to mm	Stick colour	Unit	Net EUR/100 unit at a purchase of		
							1	2 - 5	6 - 10
950xx	white/yellow with black	SR 01	0,1 - 0,5	1 - 1,4	brown	300	o. r.	o. r.	o. r.
951xx	white/yellow with black	SR 02	0,5 - 0,7	1,4 - 1,8	grey	300	o. r.	o. r.	o. r.
952xx	white/yellow with black	SR 03	0,8 - 1	1,9 - 2,6	green	300	o. r.	o. r.	o. r.
953xx	white/yellow with black	SR 06	1,5 - 3,4	2,6 - 3,5	red	300	o. r.	o. r.	o. r.
954xx	white/yellow with black	SR 09	2,5 - 6	3,3 - 4,5	blue	300	o. r.	o. r.	o. r.
955xx	white/yellow with black	SR 12	6 - 10	4,5 - 6	yellow	300	o. r.	o. r.	o. r.
956xx	white/yellow with black	SR 15	10 - 16	5,8 - 8,5	-	50	o. r.	o. r.	o. r.
957xx	white/yellow with black	SR 17	16 - 25	8,5 - 11,5	-	50	o. r.	o. r.	o. r.
958xx	white/yellow with black	SR 21	25 - 70	11 - 15,5	-	50	o. r.	o. r.	o. r.
959xx	white/yellow with black	SR 24	70 - 100	15 - 19	-	50	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request